



DITA Zoom

Zoomable

Accentuating varied sizes of objects with adjustable beam angle.



Nimble & Flexible

The zoomable beam angle and stretchable structure, meeting any challenging lighting requirements.

DITA Dark Light

Miniature and elegant

The guiding design principle for DITA series is to create the ultimate visual comfort from a minimal form.

The small and exquisite appearance leaves an impression of simplicity, yet elegance.

Designed for a variety of compositions.

Cabinet & Corridor




Every commercial space requires a scenic frame to express the relevant theme. Adopting narrow beam of DITA as decorative cabinet lighting can be an approach to echo the theme.

Leisure Area

The focal point on the tea desk provides an esthetic touch rather than its function, for wonderful conversations with friends or family.

Catering Space

By accentuating the artworks on the wall and dining tables, leaving the intertwined dark spots on the aisle, it creates a hierarchy of perception for the observers.

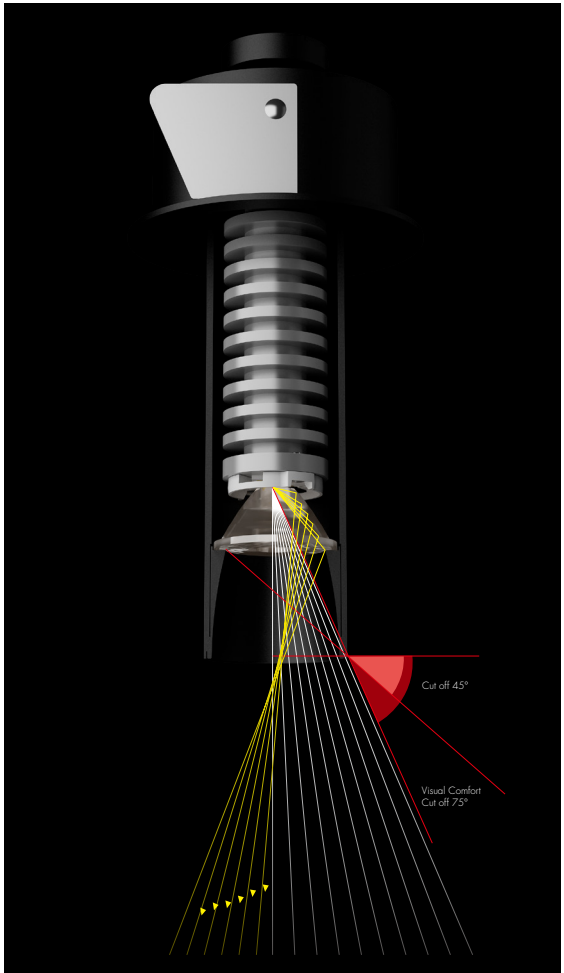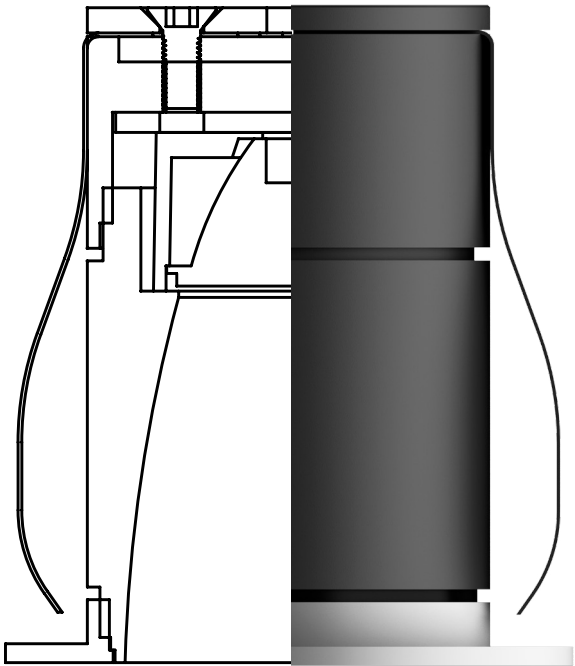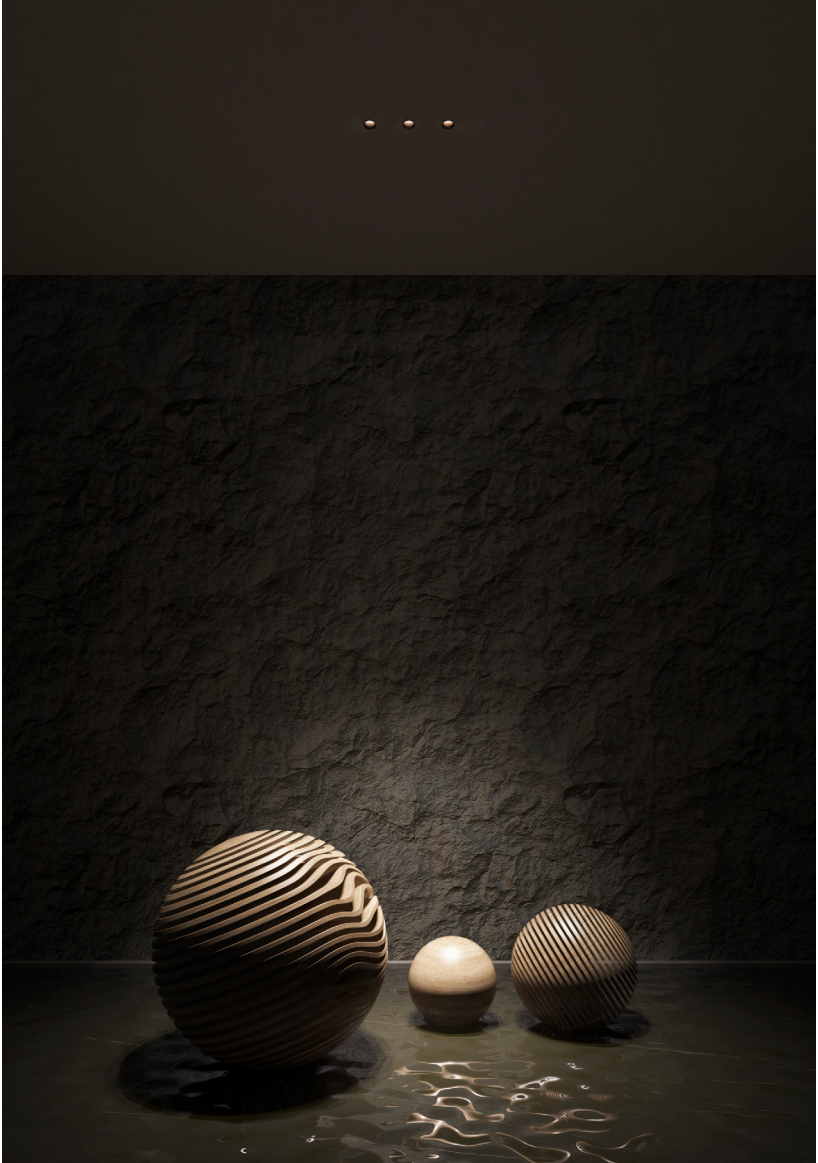

DITA Adjustable

Darklight deep recessed technology

To well define the light radiation area and effectively reduce glare, the reflector and position of light source for DITA are well-designed.

The UGR of this series for application is below 10. It truly delivers the effect of seeing light, without noticing its visible form.




DITA Zoom

Zoomable

Accentuating varied sizes of objects with adjustable beam angle.

Nimble & Flexible

The zoomable beam angle and stretchable structure, meeting any challenging lighting requirements.

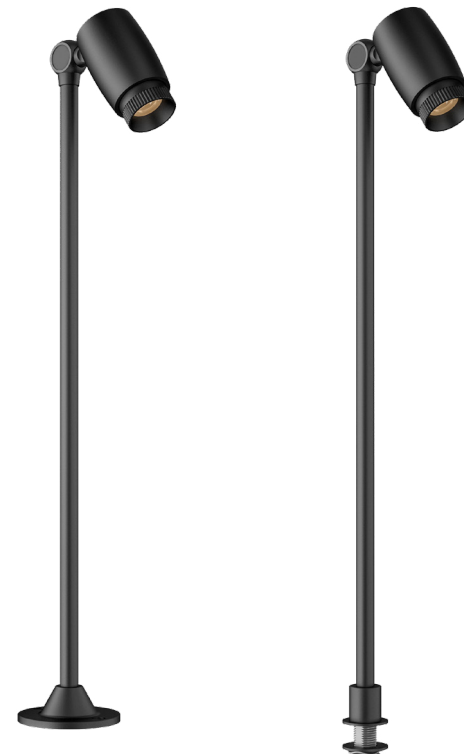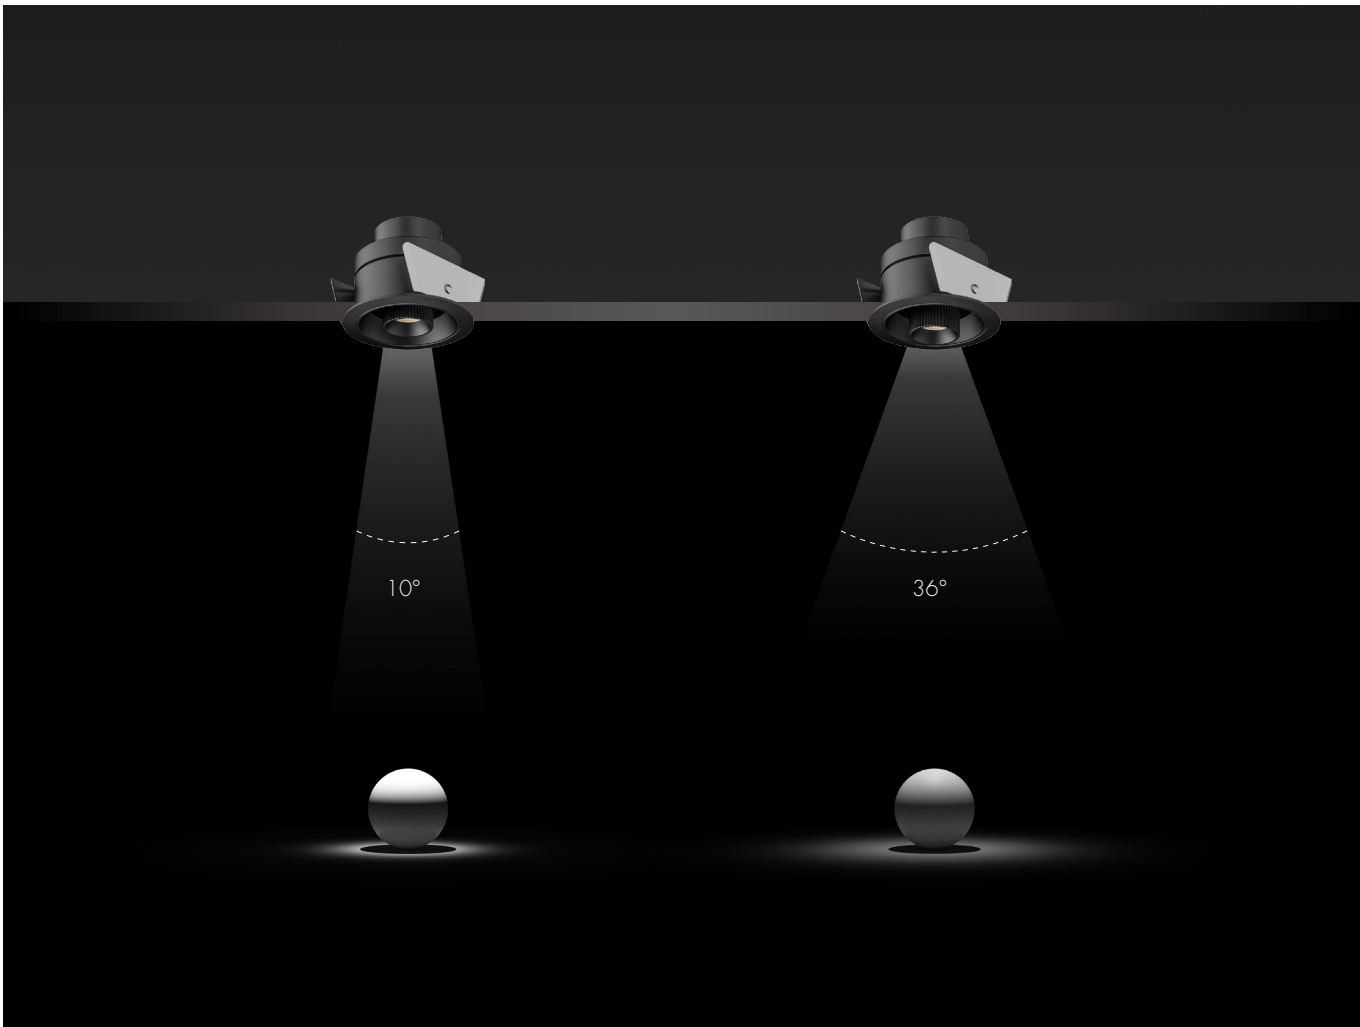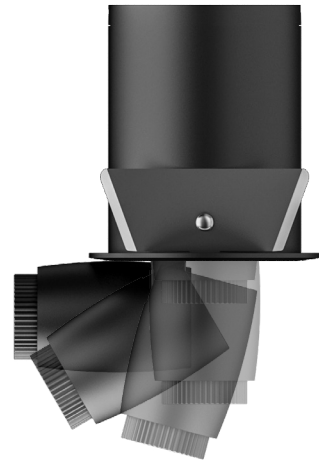

DITA Zoom Pole

Zoomable

Thanks to the twist & zoom system, the dimensions of the illuminated area can be easily modified to highlight various sizes or angles of objects.





DITA Dark Light

1W/60lm-7W/350lm

- The guiding design principle for DITA series is to create the ultimate visual comfort from a minimal form.
- The small and exquisite appearance leaves an impression of simplicity, yet elegance.
- Precise light distributions for precise illuminances with no spill light



DITA Adjustable

3W/75lm-12W/720lm


- Maximum 12W in small and exquisite appearance could enhance the lighting design inspiration.



DITA Zoom

3W/100lm

- DITA Zoom is accent light according to the project requirements.
- Thanks to zoomable technology, DITA Zoom can modify beam angle by rotating the snoot, perfectly meet different application.

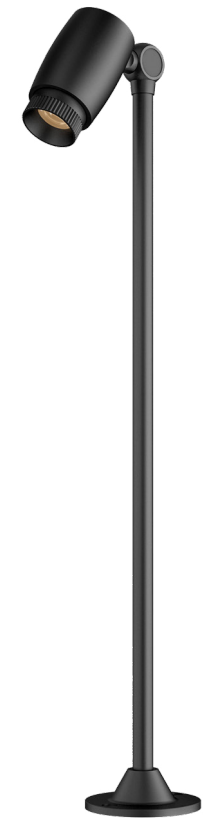

DITA Zoom Pole

3W/100lm


- DITA Zoom Pole is suitable for cabinets lighting enhancement.
- Essential and minimal fixture with high lighting general Information, this product is suitable to enhance the object exposed in the best way possible.
- DITA Zoom Pole ensures high quality, zoomable flexibility and Colour rendering.

				
	DDD035A	DDD035X	DDD045X	DDD055X
	recessed	recessed	recessed	recessed
General Information				
Optics	10°/15° Fixed	10°/15° Fixed	10°/15°/24° Fixed	15°/24°/36° Fixed
System Power (Watt)	1W	1W	3W	7W
System Luminous flux (lm)	65lm	60lm	150lm	350lm
Driver parameters	3V/250mA	3V/250mA	3V/670mA	24V/230mA
Cut out (mm)	Φ35	Φ35	Φ45	Φ55

Technical Details

Light Source	LED SMD
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<5
UGR	<13
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

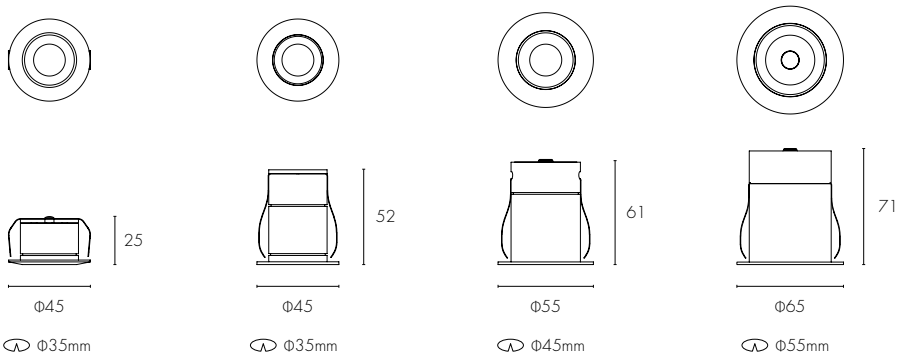


Finishes




PHOTOMETRIC


DDD035A 1W

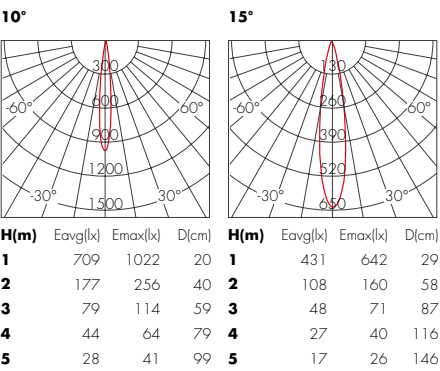


DDD035X 1W

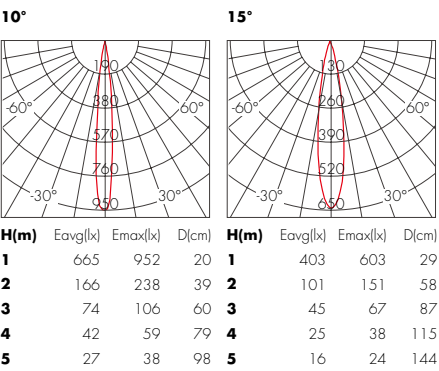

DDD045X 3W

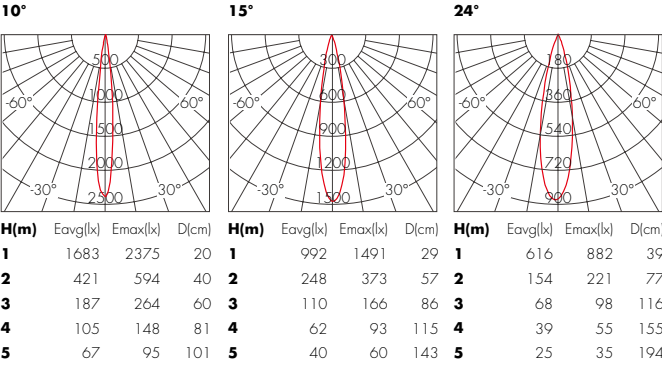

DDD055X 7W

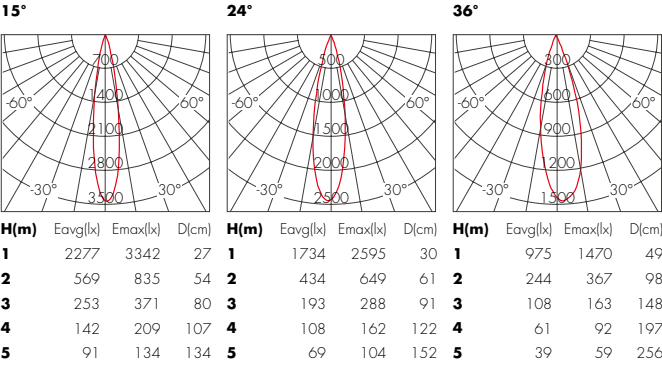


DITA Adjustable

					
	DTD045B recessed	DTD045C recessed	DTD055A recessed	DTD075X recessed	DTD075C recessed
General Information					
Optics	10°/15°/24°/36° Adjustable	10°/15°/24°/36° Adjustable	10°/15°/24°/36° Adjustable	15°/24°/36° Adjustable	12°/24°/36° Adjustable
System Power (Watt)	3W	9W	9W	12W	12W
System Luminous flux (lm)	150lm	500lm	360lm	720lm	720lm
Driver parameters	3V/670mA	12V/700mA	12V/700mA	36V/270mA	36V/270mA
Cut out (mm)	Φ45	Φ45	Φ55	Φ75	Φ75



Technical Details

Light Source	LED SMD	LED COB
Colour temperature	2700K/3000K/4000K	
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistancy	SDCM<5	SDCM<3
UGR	<9	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF, Phase, 0-10V, Dali	

Dimensions (mm)

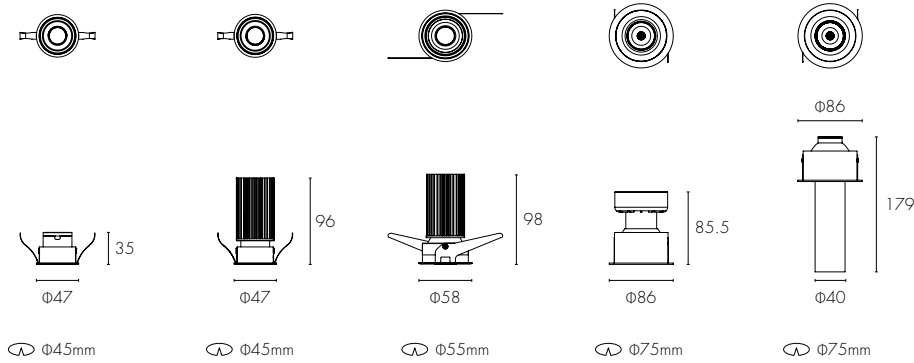


Finishes




PHOTOMETRIC


DTD045B 3W

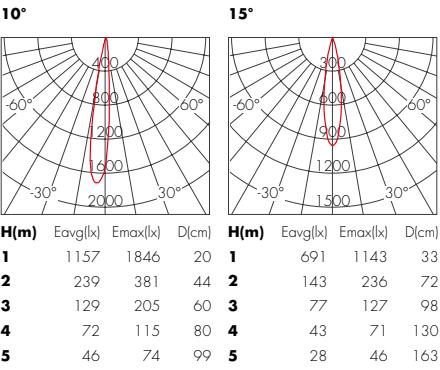


DTD055A 9W

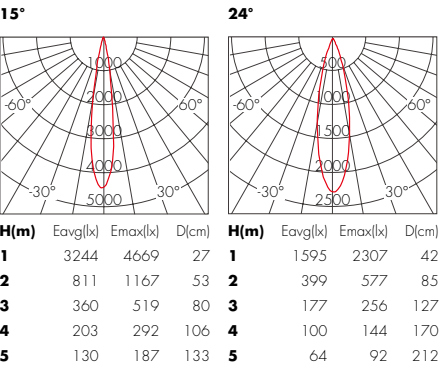


DTD075C 12W

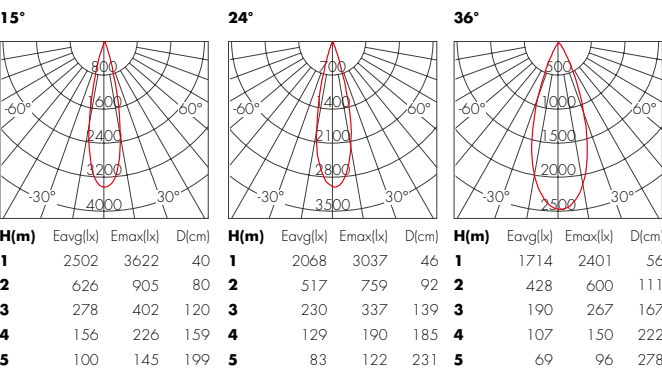

DTD045C 9W

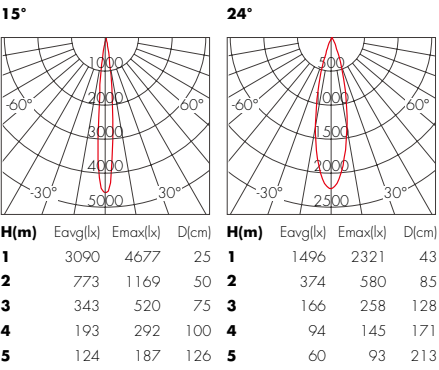

DTD075X 12W

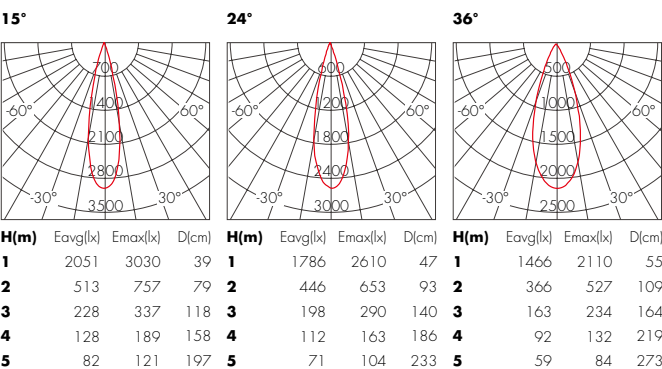

DITA Zoom


DITA Zoom Pole

	 DTD055L recessed	 DTD055W recessed	 SDN030D standing	 SDN030M recessed
General Information				
Optics	10°~36° Zoomable	10°~36° Zoomable	10°~36° Zoomable	10°~36° Zoomable
System Power (Watt)	3W	3W	3W	3W
System Luminous flux (lm)	100lm	100lm	100lm	100lm
Driver parameters	3V/670mA	3V/670mA	3V/670mA	3V/670mA
Cut out (mm)	Φ55	Φ55		Φ11


Technical Details

Light Source	LED SMD
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<5
UGR	<9
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

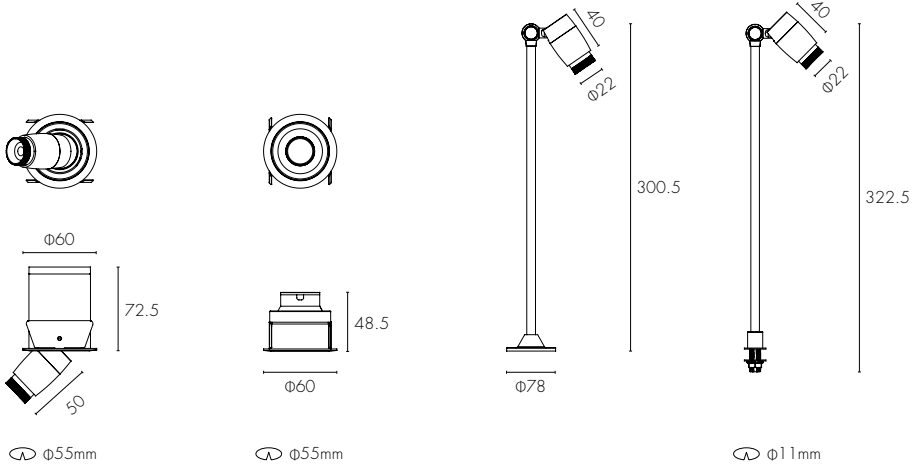

Finishes




White


Black

PHOTOMETRIC


DTD055L 3W

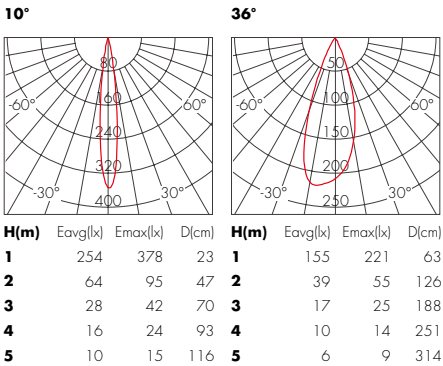

SDN030D 3W

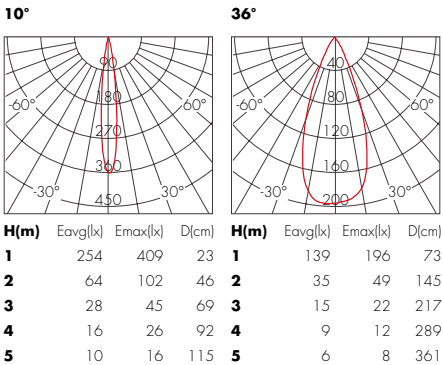

DTD055W 3W

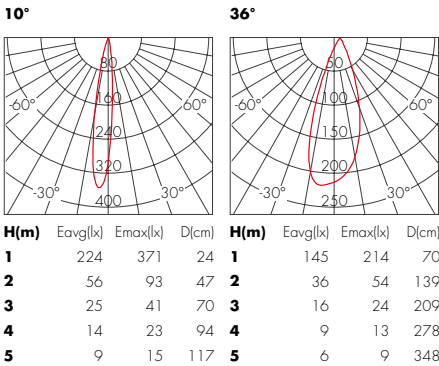

SDN030M 3W

