

ACCORD

Define your space with Coloured filters.

Thanks to the Coloured filters, it can be easily configured as needed for specific applications, ideal for the coloured display of exhibits and merchandise.

ACCORD

Configurable modular downlight

Thanks to the modular structure, it can be easily configured as needed for specific applications.
Equipped with silicone gasket and anti-fog glass, IP54 rating is optional.



Application

It is suitable for private residential spaces, restaurants, resorts and other commercial spaces.
ACCORD IP54 version is suitable for damp locations.



ACCORD

7W/450lm-9W/680lm

- New generation of ACCORD ceiling spotlight, modular structure makes it to be quicker and easier to configure.
- Integrated LED engine, excellent optical design with high efficiency heat sink.
- Adopt with better heat dissipating and Powered by first class LED chip in higher lumen output to make it as high-performance series.



ACCORD Adjustable

7W/450lm-16W/1100lm

- New generation of ACCORD ceiling spotlight with adjustable modular structure makes it to fit for different application.
- High visual comfort can be achieved with anti-glare front ring.
- The accessories of honey-comb, anti-glare snoot ,Coloured filters is available for your option.



ACCORD IP54

7W/450lm-9W/600lm

- Die-cast aluminum made body with excellent heat dissipating effect.
- Varied optical accessories, different baffles and IP54 are optional for different lighting requirements.
- Integrated LED engine, excellent optical design with high efficiency heat sink.



ACCORD IP54

12W/820lm

- The deep hidden light source structure with excellent anti-glare control makes it ideal for commercial or residential lighting applications that required maximum visual comfort.
- With silicone gasket and anti-fog glass, this series achieves IP54 rating.
- Square wall washer versions: Aesthetic and minimalist structure with slim-trim design.

ACCORD



DDY060X
recessed



DDY065X
recessed



DDY075X
recessed




General Information

Optics	15°/24°/40° Fixed	15°/24°/40° Fixed	24°/40°/60° Fixed
System Power (Watt)	7W	9W	7W
System Luminous flux (lm)	450lm	680lm	450lm
Driver parameters	36V/160mA	36V/210mA	36V/160mA
Cut out (mm)	Φ60	Φ65	Φ75

Technical Details


Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)




PHOTOMETRIC


DDY060X 7W

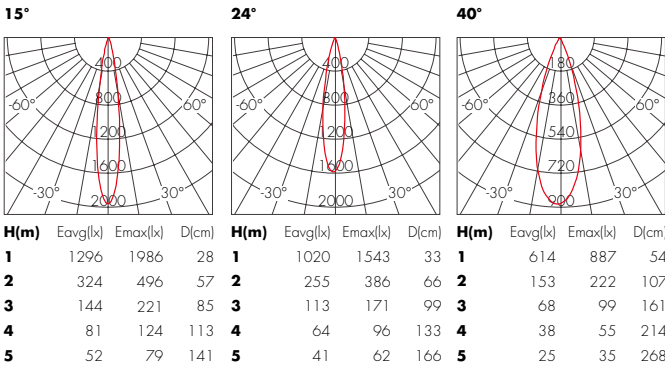

DDY065X 9W

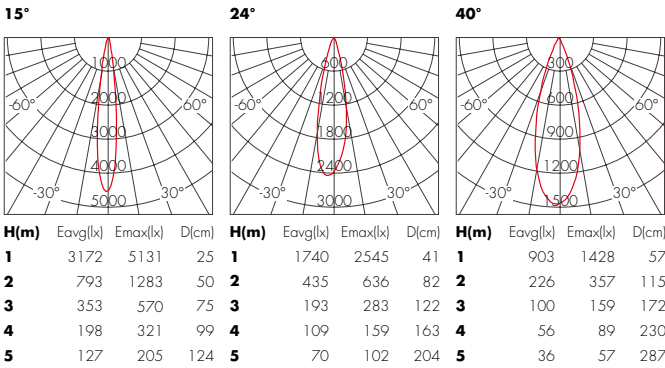

DDY075X 7W

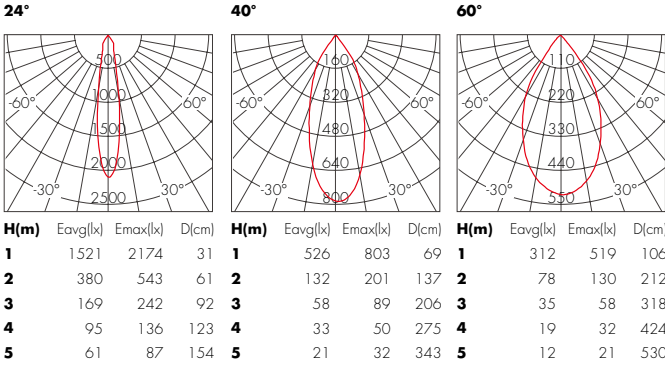

Accessories



Honey comb louvre



Prismatic Spread



Anti-glare snoot

Finishes



White



Black

Colour Filter



Red



Blue



Yellow



Green


ACCORD Adjustable

			
	DSY070X recessed	DSY075X recessed	DSY095X recessed
General Information			
Optics	15°/24°/40° Adjustable	15°/24°/40° Adjustable	15°/24°/40° Adjustable
System Power (Watt)	7W	9W	16W
System Luminous flux (lm)	450lm	680lm	1100lm
Driver parameters	36V/160mA	36V/210mA	36V/390mA
Cut out (mm)	Φ70	Φ75	Φ95

Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali


Dimensions (mm)

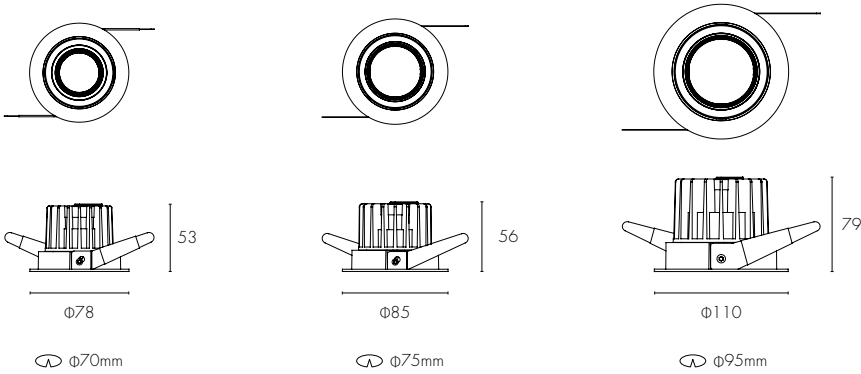


Accessories	Finishes
  	 
Honey comb louvre	White
Prismatic Spread	Black
Anti-glare snoot	

PHOTOMETRIC


DSY070X 7W

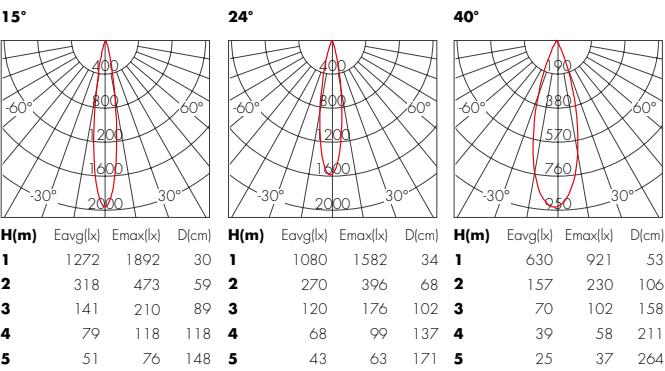


DSY075X 9W

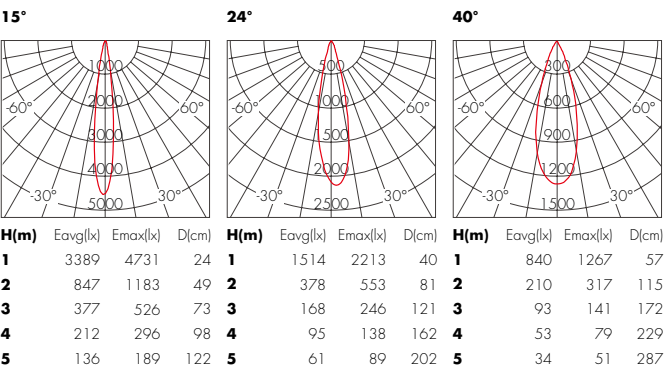

DSY095X 16W

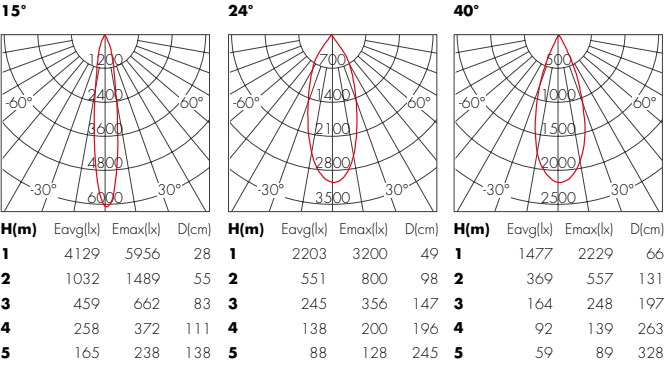

Colour Filter

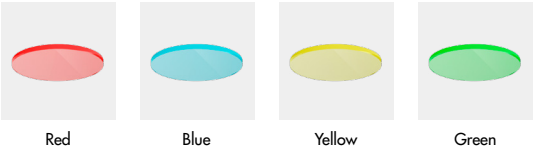


ACCORD IP54

				
	DDY060S recessed	DDY065S recessed	DDY085X recessed	DDY085F recessed
General Information				
Optics	15°/24°/40° Fixed	15°/24°/40° Fixed	15°/24°/40° Fixed	15°/24°/40° Fixed
System Power (Watt)	7W	9W	12W	12W
System Luminous flux (lm)	450lm	600lm	820lm	820lm
Driver parameters	36V/160mA	36V/210mA	36V/270mA	36V/270mA
Cut out (mm)	Φ60	Φ65	Φ85	85x85

Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP54
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

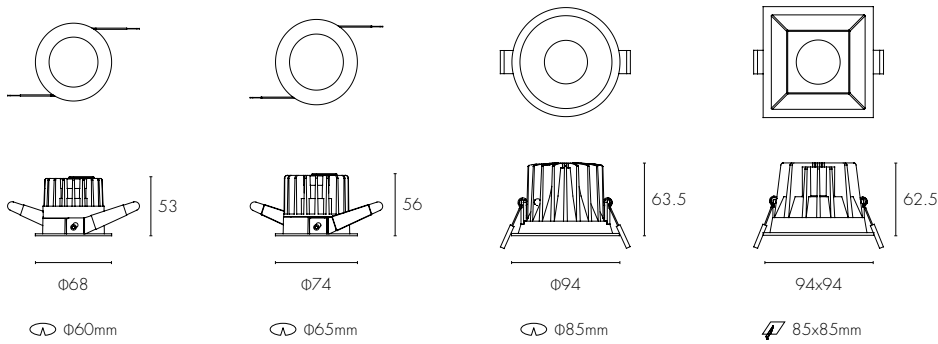

Accessories



Anti-glare snoot

Finishes




White




Black

PHOTOMETRIC


DDY060S 7W

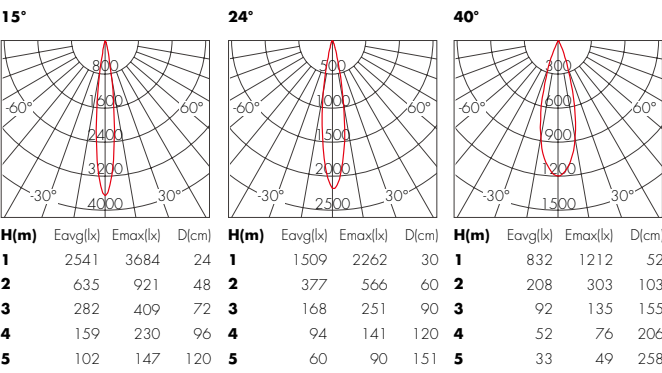

DDY065S 9W

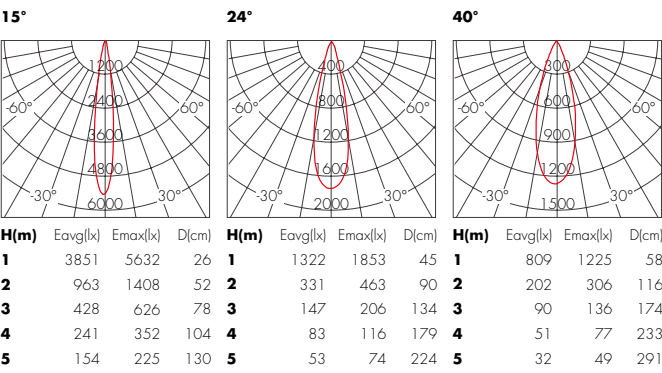

DDY085X 12W

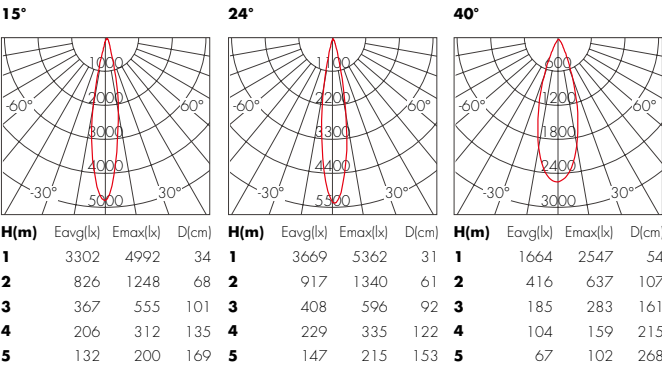

DDY085F 12W

