




LATIO Linear Light

Reflector/Prismatic



Tunable white 3000K-5700K



Tunable white enables you to perfectly illuminate workplain and ideally emphasise environment. Warm white light colours is suitable for relaxing and winter time. Neutral or cool white light colours are ideal for helping maintain performance and concentration for a longer time.



Dimmable 15%-100%

Dimmable function give you flexibility to choose the preferred illuminance level. Extra-High illuminance level like 500lx is suitable for concentrating work. Regular illuminance level like 300lx is suitable for regular work.



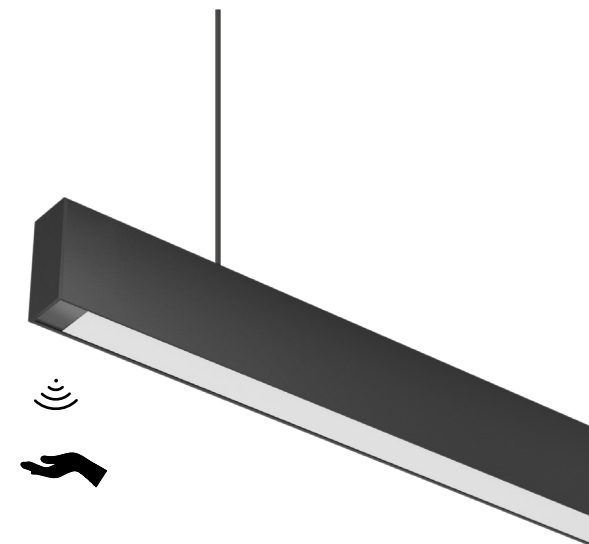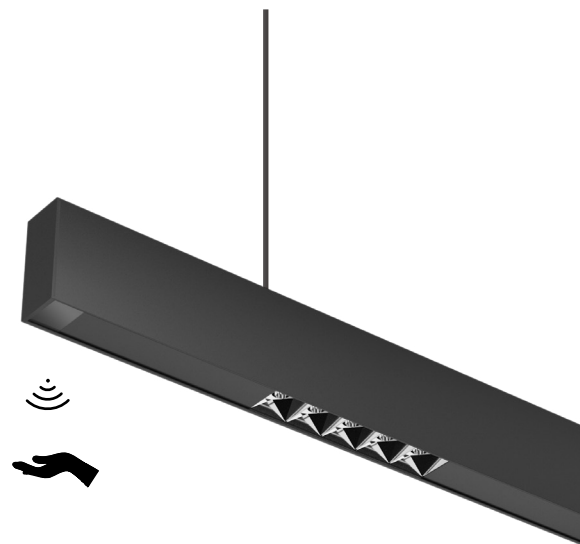

LATIO Reflector

30W/2400lm-40W/3350lm

- Slender and minimalist luminaire body are ideal for architectural lighting and prestigious offices.
- The innovative linear lighting with designed glare-free optics offers excellent visual comfort and light distribution for workstation lighting.
- Two/Three LED Modules per luminaire head are for precise direct lighting.

LATIO Reflector Smart Version

30W/2400lm-40W/3350lm

- Thanks to the integrated Proximity sensor LATIO Smart could detect the action of hands, providing incredible gesture control. Dimmable and ON/OFF function is available for LATIO Reflector.
- Slender and minimalist luminaire body are ideal for architectural lighting and prestigious offices.
- The innovative linear lighting with designed optics offers excellent visual comfort and light distribution for workstation lighting.
- Two/Three LED Modules per luminaire head are for precise direct lighting.

LATIO Prismatic





30W/2400lm-40W/3200lm

- Slender and minimalist luminaire body are ideal for architectural lighting and prestigious offices.
- The innovative linear lighting with designed prismatic lens optics offers excellent flood light distribution for workstation lighting.
- Prismatic Lens technology provides general light distribution.

LATIO Prismatic Smart Version

30W/2400lm-40W/3200lm


- Thanks to the integrated Proximity sensor LATIO Smart could detect the action of hands, providing incredible gesture control.
- Tunable White, Dimmable and ON/OFF function is available for LATIO Prismatic.
- Slender and minimalist luminaire body are ideal for architectural lighting and prestigious offices.
- The innovative linear lighting with designed prismatic lens optics offers excellent flood light distribution for workstation lighting.

				
	XL3476G2L12 suspended	XL3476G3L15 suspended	XL3476B2L12 suspended	XL3476B3L15 suspended
Performances				
Optics	38° Fixed	38° Fixed	38° Fixed	38° Fixed
System Power (Watt)	30W	40W	30W	40W
System Luminous flux (lm)	2400lm	3350lm	2400lm	3350lm
Driver parameters	30V/900mA	45V/800mA	24V/0-1250mA	24V/0-1875mA
Tunable white				
Dimmable			●	●


General Specifications

Light Source	LED SMD		
Colour temperature	2700K/3000K/4000K		
CRI (Ra/R9)	RA>90/R9>50		
Color Consistancy	SDCM<5		
UGR	<16		
IP-rated	IP20		
Lifetime	>50,000h		
Warranty	3 Years/5 Years		
Driver	ON/OFF	Dimmable 15%-100%	

Dimensions (mm)

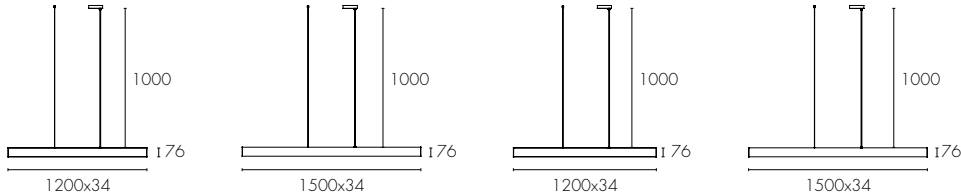


Finishes




PHOTOMETRIC


XL3476G2L12 30W

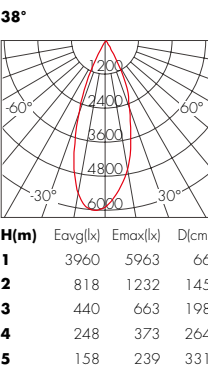


XL3476G3L15 40W




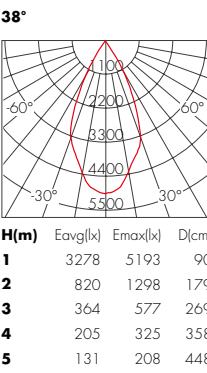


XL3476B2L12 30W

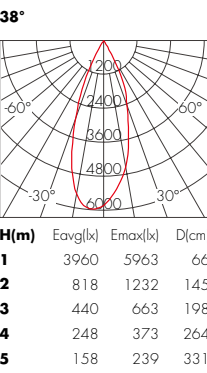

XL3476B3L15 40W

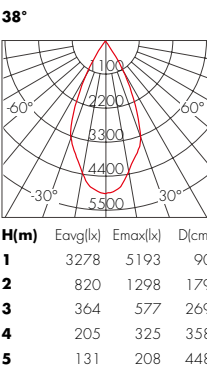


				
	XL3476F1L12 suspended	XL3476F1L15 suspended	XL3476A1L12 suspended	XL3476A1L15 suspended
General Information				
Optics	80° Fixed	80° Fixed	80° Fixed	80° Fixed
System Power (Watt)	30W	40W	30W	40W
System Luminous flux (lm)	2850lm	3200lm	2850lm	3200lm
Driver parameters	72V/350mA	100V/350mA	24V/0-1250mA	24V/0-1875mA
Tunable white			●	●
Dimmable			●	●


Technical Details

Light Source	LED SMD	
Colour temperature	2700K/3000K/4000K	3000K-5700K
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistency	SDCM<5	
UGR	<16	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF	Tunable White & Dimmable 15%-100%

Dimensions (mm)

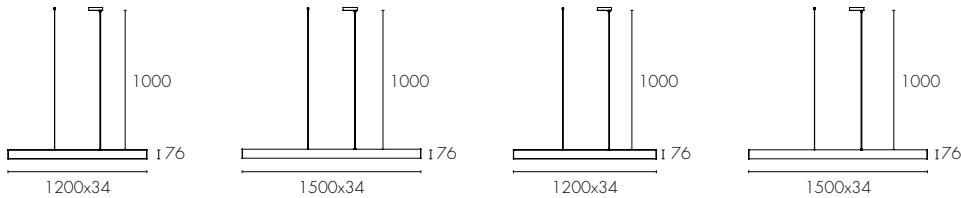


Finishes




PHOTOMETRIC


XL3476F1L12 30W

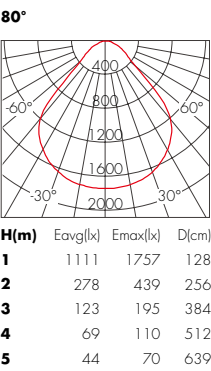

XL3476F1L15 40W

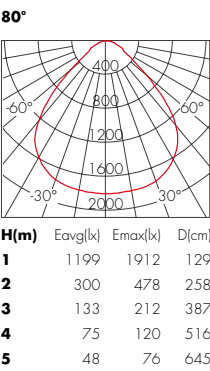

XL3476A1L12 30W

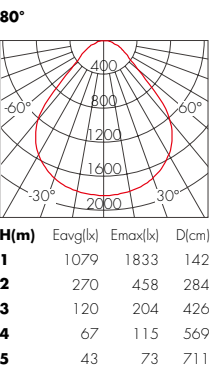

XL3476A1L15 40W

